


ATTACHED SIDEWALK

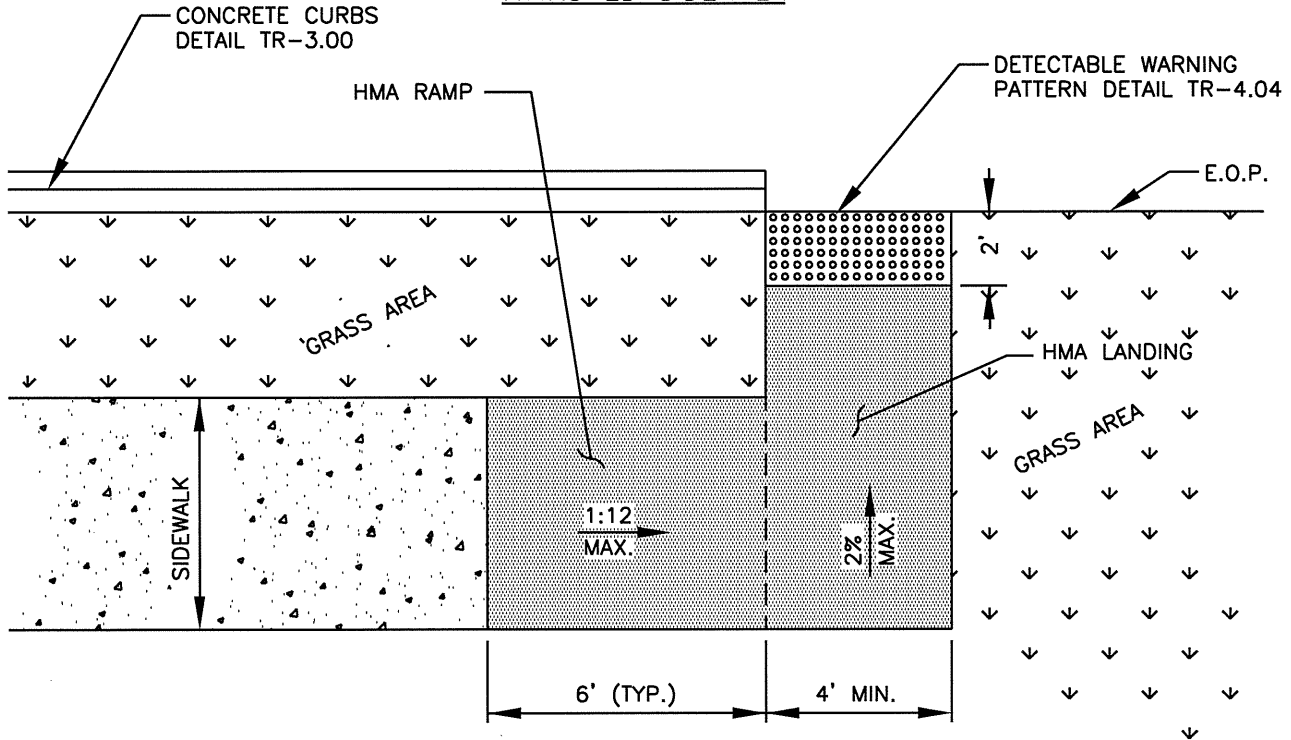

DETACHED SIDEWALK


NOTES:

1. CLASS "G" HOT MIX ASPHALT (HMA) SHALL BE A MINIMUM OF 0.20' DEEP, OVER 3" MIN. DEPTH OF AGGREGATE (5/8"-0).
2. HMA LANDINGS SHALL BE AT A SLOPE NO GREATER THAN 2%.
3. BEGIN HMA RAMP AT NEAREST SIDEWALK JOINT.

N.T.S.

TEMPORARY ASPHALT CURB RAMP

PLAN #



CITY OF BATTLE GROUND
APPROVED

Rb

6/9/08

CITY ENGINEER

DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	6/9/08	JMH	MCH

TR-4.14