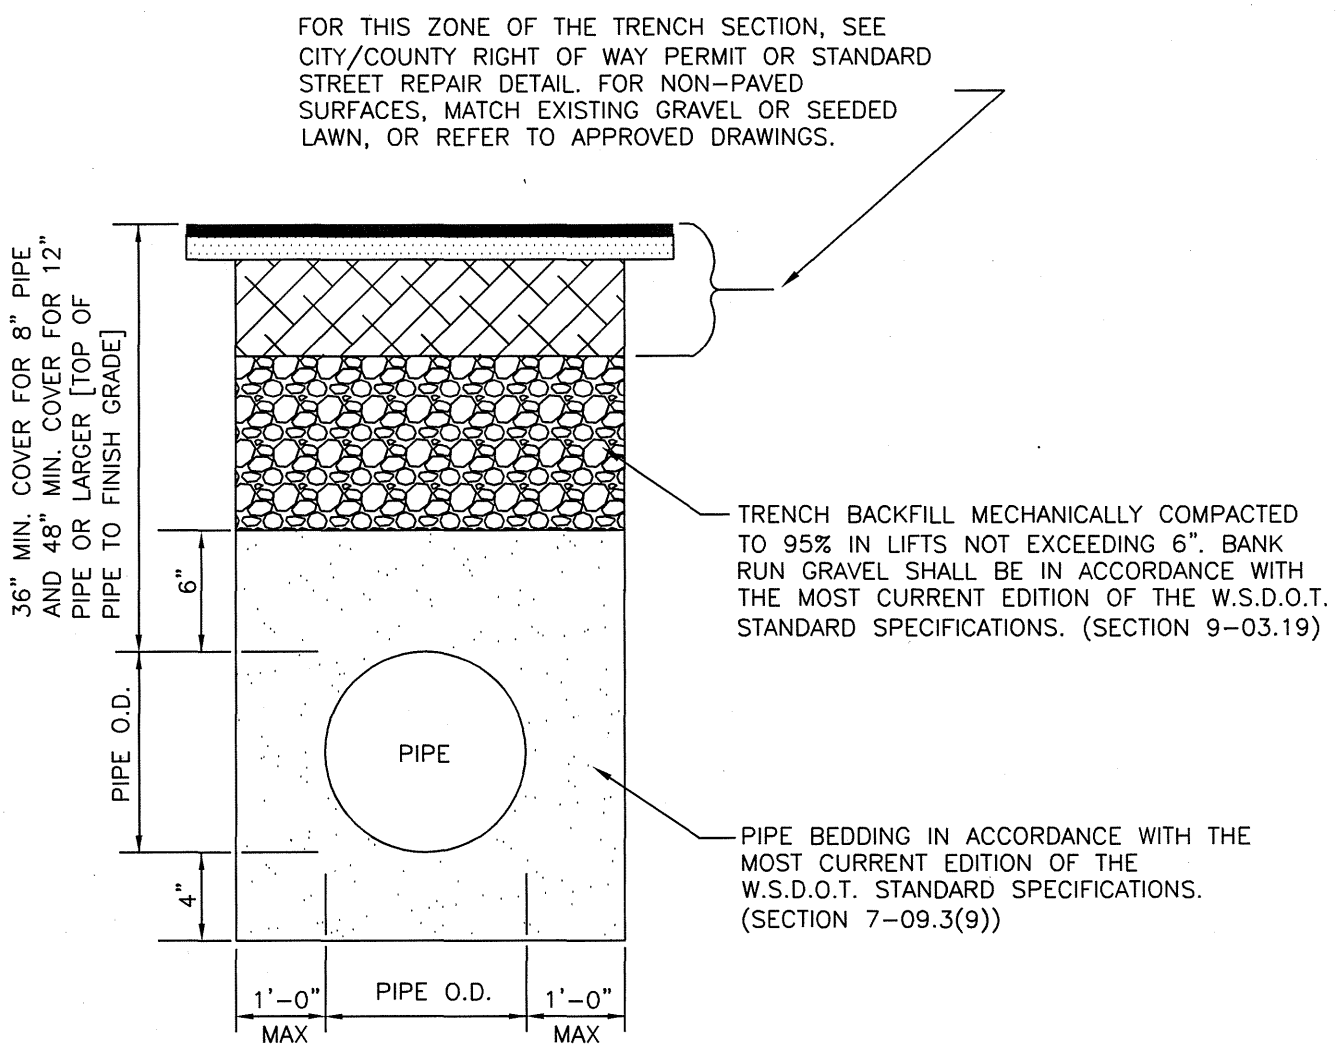


NOTE:

1. OVERSIZE MATERIAL (4"+) SHALL NOT BE ALLOWED IN TRENCH.
2. COMPACTION PERCENTAGES REFER TO RELATIVE DRY DENSITY AS DETERMINED BY STANDARD PROCTOR AASHTO MODIFIED T 180
3. ALL EXISTING PAVED SURFACES SHALL BE SAW CUT A MINIMUM OF 6" OUTSIDE OF EDGE OF TRENCH TO PROVIDE A NEAT STRAIGHT EDGE.
4. THE EDGES OF ALL EXISTING ASPHALT SURFACES SHALL BE CLEANED AND A TACK COAT SHALL BE APPLIED. ALL JOINTS SHALL BE SAND SEALED.
5. ALL BACKFILL SHALL BE MECHANICALLY COMPACTED IN LIFTS WHICH IN NO CASE EXCEED 12" LOOSE.

TYPICAL TRENCH BACKFILL AND BEDDING

PLAN #

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

9/24/07
CITY ENGINEER — DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	4/16/07	JMH	MCH
2	9/24/07	MCH	MCH

WA-3.3